


TXL16 RANGE OF HIGH FREQUENCY SWITCHING REGULATOR INDUCTORS

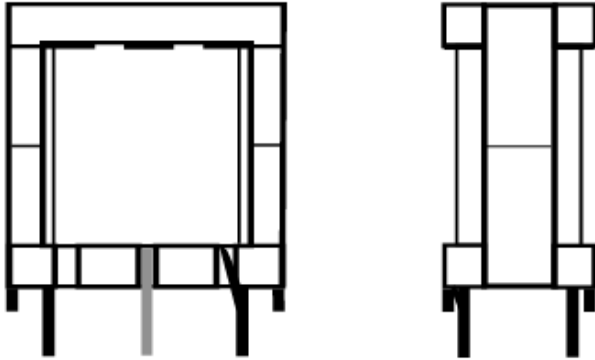

TECHNICAL DESCRIPTION:

Primeworld TXL16--- range of high current inductors is designed to operate in high frequency switching regulator circuits. Windings are "Class 155" (IEC 60317-0-1) or higher temperature enamelled copper wire, wound on a vertical EF16 bobbin. One version of the bobbin with no pins and no stand-offs simply holds the tinned lead-outs in place, the other with four pins, terminates them on to two of the diagonally opposite pins. Bobbin material is DuPont Rynite FR530L PET with UL746B temperature index of 150°C and, a flammability rating of UL94 V-0 @ 0.35mm.

High frequency low loss ferrite cores used in TXL16 series make them a superior choice for high frequency switching regulators. TXL16 range not only offers lower core losses but also low ripple current by keeping inductance constant over the load range. Vertical mounting configuration and its narrow width allow TXL16 range to directly replace toroidal inductors using iron powder and other costly alloy materials.

The TXL16 range is designed for use in buck regulators, boost regulators, isolated power supplies and dc/dc converters operating up to 500KHz.

RATINGS AND CHARACTERISTICS:

Maximum Working Voltage: 250V ac rms. 400V dc

Rated current: See tables for TXL16--- range

Inductance: See tables for TXL16--- range

DC Resistance: See tables for TXL16--- range

Climatic category: 25/105/56

Maximum temperature range:

Operating: -25 to +105 °C

Storage: -55 to 125 °C

Mass: 10g max

Vibration: Frequency sweep of 10Hz to 55Hz with 0.35mm displacement for 6 hours. IEC68-2-6 Test Fc

Requirement: No visible damage, Inductance +/- 10%

Bump: 1000 bumps of each 16ms with acceleration of 98m/s. IEC68-2-29 Test Eb

Requirement: No visible damage, Inductance +/- 10%.

Resistance to soldering heat: Solder bath for 3s @ 350 °C, 6mm from body IEC68-2-20A Method 1B

Solderability: Maximum soldering time, 2.5s @ 235 °C Solder globule test, IEC 68-2-20Ta.

Robustness of terminations:

1Kg (10N) IEC 68-2-21 Test Ua Tensile

500g (5N) IEC 68-2-21 Test Ub Bending

Requirement: No visible damage to the body. No deviation in nominal inductance and dc resistance.

INSPECTION REQUIREMENTS

Visual inspection: Random Sample

Failure Criteria:

Marking	- Non-legible marking. - Missing or double marking.
Package	- Dimensions out of tolerance. - Broken or damaged plastic. - Contamination by oil, flux, etc. - Voids, holes or cracks.
Leads	- Broken, cracked or loose lead. - More than 10% non-plated surface in the soldering area. - Blistering, peeling or other surface defects exposing base material. - Contamination by oil, flux, etc.
Packing	- Inconsistent mechanical strength. - Incorrect labelling and sealing. - Incorrect quantity and type.

Inductance: 100%

Limits:

+/- 20% for L < 22uH @ 10KHz, 0.1V ac rms.

+/- 10% for L > 22uH @ 10KHz, 0.1V ac rms.

DC resistance: 100%

Limits: +5% -10%.

PRIMEWORLD LIMITED

Derwent, Sawbridgeworth Road, Hatfield Heath, Bishop's Stortford, HERTS, CM22 7DR


Tel: 01279 730031

e-mail: sales@primeworld.co.uk


TXL16--- RANGE:

CODE	NOMINAL INDUCTANCE	DC RESISITANCE	CONTINUOUS DC CURRENT	SATURATING DC CURRENT	MAX ET _{OP}	Lead Dia. d
TXL16__	L _n (μH) @ 1KHz	(OHM) MAX	(A) @ 85° C	(A) @ 90% L _n	(V.μsec)	(mm) MAX
TXL16SSA	10	0.011	6.88	9.7	19.9	1.1
TXL16SSB	15	0.013	6.22	7.9	24.4	1.1
TXL16SSC	22	0.024	4.54	6.5	29.5	0.9
TXL16SSD	33	0.038	3.64	5.3	36.2	0.8
TXL16SPD	38	0.052	3.10	5.0	38.8	0.7
TXL16SSE	47	0.046	3.29	4.5	43.2	0.8
TXL16SSF	68	0.073	2.62	3.7	51.9	0.7
TXL16SSG	100	0.090	2.36	3.1	63.0	0.7
TXL16SPG	114	0.096	2.28	2.8	66.5	0.7
TXL16SSH	150	0.115	2.08	2.5	77.1	0.7
TXL16SPH	180	0.151	1.82	2.3	84.5	0.6
TXL16SSI	220	0.198	1.59	2.1	93.4	0.6
TXL16SSJ	330	0.365	1.17	1.7	114.4	0.5
TXL16APA	3.6	0.009	7.38	16.1	11.9	0.8
TXL16BPW	1000	1.099	0.67	1.0	199.1	0.35

Mechanical Data

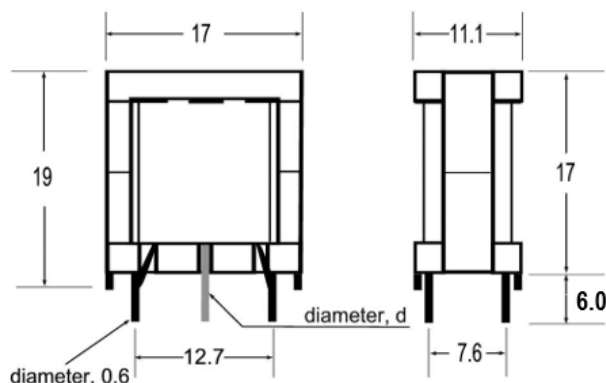

Mounting Detail

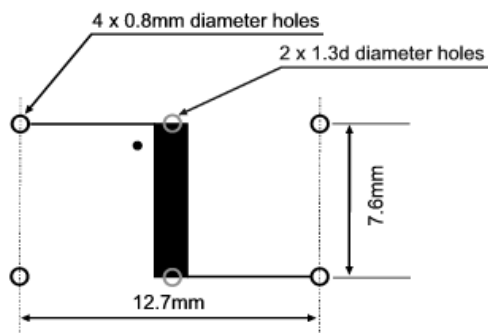

Sixth Letter of component code indicates terminal orientation and bobbin type

Mounting detail: Top (component side) view – Letter A – 4 pin bobbin

Bottom (solder side) view – Letter B – 4 pin bobbin

Central leadouts only at diameter d – Letter S – no other pins

Specifications and information contained in this data sheet are intended for guidance only. The Company's policy is one of continuous improvement and the right to change materials, designs, dimensions and descriptive matter, etc. at any time without notice is reserved. Primeworld shall not be liable for any loss, direct or consequential, which may result from the use of this information. . © 2024 Primeworld Limited

PRIMEWORLD LIMITED

Derwent, Sawbridgeworth Road, Hatfield Heath, Bishop's Stortford, HERTS, CM22 7DR

Tel: 01279 730031 e-mail: sales@primeworld.co.uk